

LEVER HOIST – RIGTECH ELITE MODEL



APPLICATIONS

- Suitable for applications in the mining, construction, transport and automotive industries

CONSTRUCTION


- Allowable ambient conditions
 - » Operating temperature range: -10°C to +60°C
 - » Operating humidity: 100% relative humidity or less; this product should not be used under water

PRODUCT FEATURES

- Relevant standards: AS/NZS 1418.2 and EN13157
- Key internal components are CNC machined and adhere to the most stringent machine tolerances
- 'T' type hooks for improved load holding

Product Code	Rated Capacity (kg)	Lifting Height (m)	Minimum Distance Between Hooks - Hmin (mm)	No. of Load Chain Falls	Load Chain G80 (mm)	Length Lever Handle - L (mm)	Dimensions (mm)			Net Weight (kg)	Extra Weight per Meter (kg)
							A	B	C		
RTLH0.25	250	1.5	235	1	4x12	168	100	70	86	2.4	0.35
RTLH0.5	500	1.5	325	1	5x15	308	110	85	126	4.18	0.52
RTLH0.8	800	1.5	340	1	6x18	308	147	87	132	6.92	0.72
RTLH1.6	1600	1.5	400	1	7.1x21	408	170	99	145	11.23	1.08
RTLH3.2	3200	1.5	520	1	10x30	418	200	112	198	21.12	2.22

TECHNICAL DRAWINGS

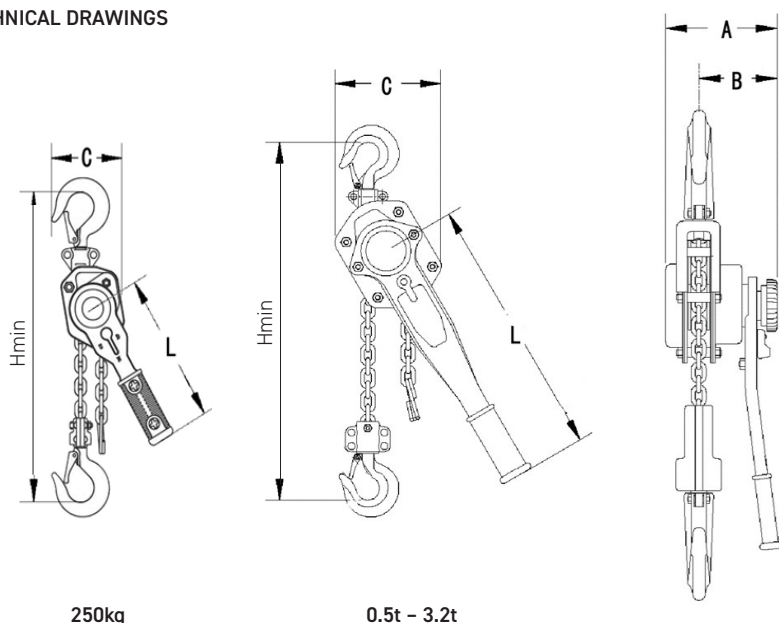

SPARE PARTS

Product Code	Bottom Hook	Top Hook	Safety Latch
RTLH0.8	RTLH0.8	RTLH0.8	RTLHSL0.8
RTLH1.6	RTLH1.6	RTLH1.6	RTLHSL1.6
RTLH3.2	RTLH3.2	RTLH3.2	RTLHSL3.2

Chain & Rigging has taken every precaution to ensure accurate information on this data page, but accept no liability for any errors or omissions. Chain & Rigging reserves the right to modify specifications at any time.